


FLEXI ADAPTER FOR DETEX

This adapter is used to attach the DetEx detector to protected technology in the case of vibrating technologies or poorly available space for extension.

This is an abrasion resistant industrial hose. It is available in standard lengths of 500mm + 2pc buckles + 2pcs of Detex adapters (see picture).



Assembly flexi adapter detector and adapters Detex:

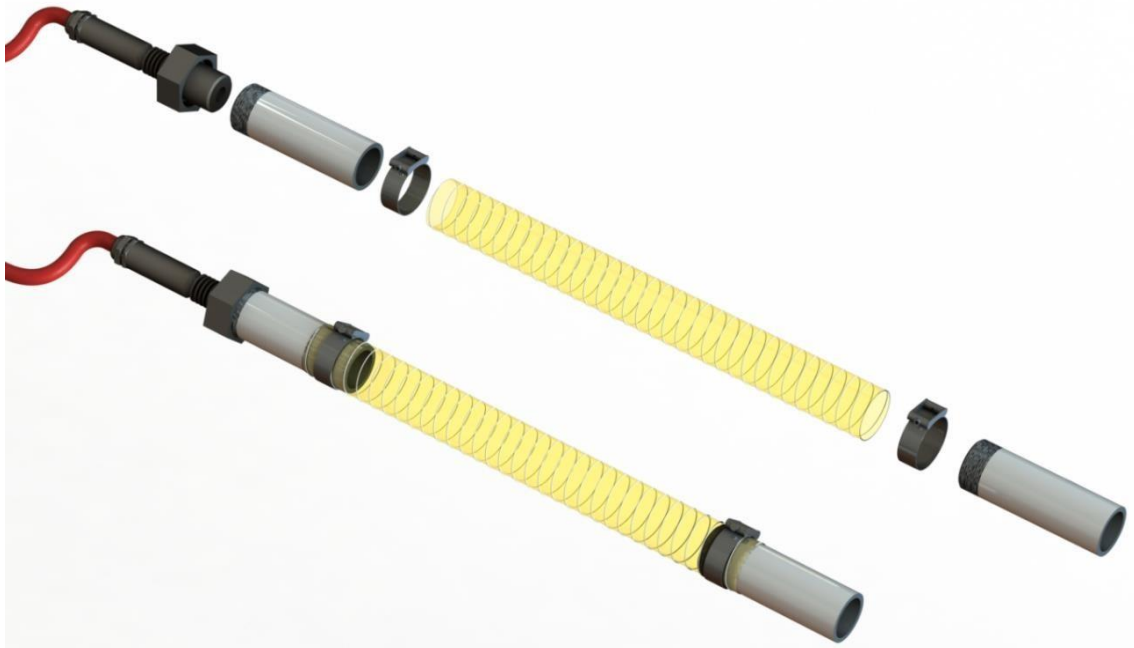

CLASSIFICATION	
Material	Transparent polyurethane
Internal diameter	50 mm
Length	500 mm
Reinforcement	Spiral of steel wire
Working pressure	-0,4 bar to 1,8 bar
Thermal resistance	-40°C to 100°C
Radius of bend	75mm